

Opti-Gard Holder


Oseco's Opti-Gard Holder caters to multiple flange ratings

FEATURES

- Multiple flange ratings: ANSI, PN, and DIN
- Familiarity for maintenance/handling
- Single set of documents for quality engineers
- Single stock code for procurement

Opti-Gard Holder

Oseco's Opti-Gard Holder™ is designed to cater to multiple flange ratings. It comes available with taps for an excess flow valve/pressure gauge and for the integral Flo-Tel+ rupture detection sensor.

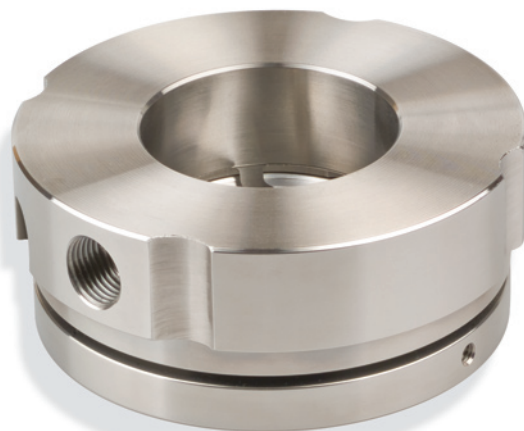

Oseco Inc

1701 W. Tacoma
Broken Arrow Oklahoma 74012 USA
Tel: (918) 258-5626
Fax: (918) 251-2809

*Visit the products section of
oseco.com to ensure you have
the most recent information.*



www.oseco.com

Contact Oseco at **800-395-3475**
or email us at **info@oseco.com**.

Opti-Gard Holder Dimensional Data

| Size (inches) | ANSI Rating | O.D. (inches) | Height (inches) |
|-------------------------|--------------------|-------------------------|---------------------------|
| 1 | 150/300/600 | 2.75 | 1.59 |
| 1.5 | 150/300/600 | 3.63 | 1.67 |
| 2 | 150/300/600 | 4.25 | 1.73 |
| 3 | 150/300/600 | 5.75 | 2.17 |
| 4 | 150/300 | 7.00 | 2.28 |
| 6 | 150/300 | 9.75 | 2.91 |
| 8 | 150 | 10.88 | 3.58 |
| 10 | 150 | 13.25 | 4.14 |
| 12 | 150 | 16.00 | 4.76 |



Let us help you with all your pressure relief questions. Contact Oseco at **800-395-3475** or email us at **info@oseco.com**.

Oseco Inc
 1701 W. Tacoma
 Broken Arrow Oklahoma 74012 USA
 Tel: (918) 258-5626
 Fax: (918) 251-2809



Visit the products section of oseco.com to ensure you have the most recent information.

www.oseco.com